

## USAGE INSTRUCTIONS

1. To install battery: Unscrew tail cap. Insert positive end of the battery towards LED. Tighten the tail cap till it's completely closed.
2. To turn the light on: quickly push the side button to illuminate LED;
3. To change modes: press and HOLD down side button. The last setting used will be auto-memorized when turned off.
4. Access to strobe function: Turn light off and hold down side switch (long click, 0.8 seconds). The light will remain on strobe until you turn off the light.
5. To lock the light: (1) 1\*18650-2600mAh: Turn the light off and hold down side switch, the flashlight will go to strobe first for 5 seconds, and then is locked. (2) 2\*CR123A: Turn the light off and hold down side switch, the flashlight will go to last setting first for 5 seconds, and then is locked.
6. To unlock the light: double click the side switch.

## LOW BATTERY INDICATOR

1. When the battery is close to being depleted, the Side Switch will turn "RED". At this point follow charging instructions.

## CHARGING INSTRUCTIONS

1. Plug USB end of the charging cable into a 5V power source.
2. Attach MAGNETIC end of the charging cable to CHARGING PORT of flashlight. (Indicator Light will turn "BLUE")
3. The indicator light will change from "BLUE" to "RED", this will indicate that the flashlight is charging.

**LED Type:** Cree XM-L2 U3 White LED


**Battery:** (1) 18650 Rechargeable Li-ion, NOT compatible with RCR123A / 16340

**Size:** Length: 111.4 mm  
Bezel Diameter: 25.4mm  
Body Diameter: 23mm

**Weight:** 60g (without battery)

## ILLUMINATION FUNCTIONS

18650 (2600 mAh)	Mode:	Firefly	Low	Medium	High	Turbo	Strobe
	Max Output:	.51 lm	50 lm	180 lm	480 lm	1300 lm	1300 lm
	Runtime:	25 Days	25 hrs	10.5 hrs	2.97 hrs	2.6 hrs	3 hrs
2 x CR123A (3V)	Max Output:	.51 lm	50 lm	180 lm	—	—	—
	Runtime:	450 hrs	8.1 hrs	6.2 hrs	—	—	—

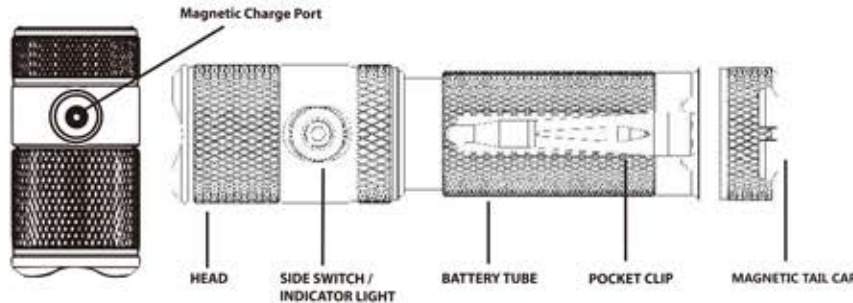

# M6

RECHARGEABLE FLASHLIGHT

USER MANUAL

4. When charging is complete the indicator light will change from "RED" to "BLUE".

## SPECIAL FEATURE

We have also programmed in a special feature that will allow you to use the light while the M6 is in charge mode. This function is useful when you would like to use the light as a nightlight while charging.

1. To activate this feature, the light must be in charge mode.
2. You will only have access to Firefly, Low and Medium illumination functions.
3. Quick push the side switch to turn on the light, then hold down the side switch to cycle: Firefly-Low-Medium.
4. To Turn the light off, hold down the side switch, or detach the charging cable and re-attach.

## Maintenance

Every 3 months, threads should be wiped with a clean cloth followed by a thin coating of silicon-based lubricant.

## FEATURES & SPECIFICATIONS

- Powerful CREE XM-L2 U3 LED produces 1300 Lumens at the brightest setting including strobe.
- 200+ meters of throw to illuminate both long and short distances.
- Simple user interface for tactical and self-defense . Integrated side switch for quick access of functions.
- Unique digital circuit technology to maximize battery life and give consistent light output.
- Reverse polarity protection. Protects from improper battery installation.
- 6 different settings that include 5 levels of brightness plus a strobe. Auto memorization for all settings.
- Machined from aircraft grade aluminum. Has type III anodized finish.
- Double coated glass lens to give maximum OTF (Out The Front) brightness and beam distance.
- Tempered glass to resist breaking and scratching upon impact.
- Waterproof to IPX8 standard. Submersible up to 2 meters under water.

## DISCLAIMER

- After long periods of use on the highest setting, the surface area may get hot. Please use caution when using the flashlight in a constant high brightness level. It is recommended to let the flashlight cool down to prevent any injury.
- High intensity light is harmful to human eyes. This product is not meant to be handled by children under the age of 18 without adult supervision.
- Use the highest quality, protected-circuit batteries to insure maximum performance and safety. Consult with the manufacturer regarding any questions or concerns.
- PowerTac's liability is voided if the light is not used in a proper manner or if modified.
- PowerTac reserves the right to change the design and/or specifications of all PowerTac products without prior notice.
- Please do not change batteries at dangerous locations such as gas stations. Batteries must only be changed or removed when light is off.
- Do not use or attempt to recharge a disposable CR123 battery! Do not throw the flashlight into a fire as an explosion may occur.

## THE POWERTAC NO-HASSLE LIFETIME WARRANTY

Please visit our website at [powertac.com](http://powertac.com) for full warranty policy.

## WARRANTY DISCLAIMER

The above warranty is exclusive, and to the extent permitted by applicable laws, shall be in lieu of all other warranties, express or implied, including, without limitation, any warranty of merchantability or fitness for a particular use or purpose. PowerTac disclaims any and all liability for product malfunctions, physical injuries, or property damages that result in whole, or in part, from the criminal, negligent, or improper use of the product, or from modifications or alterations thereto. In no event shall PowerTac be liable for any incidental, special, or consequential damages relating to the purchase, use, or performance of any PowerTac product.

## WARRANTY CLAIMS

Please go to [www.powertac.com/warranty](http://www.powertac.com/warranty) and follow instructions.

© 2018 POWERTAC USA, INC. ALL RIGHTS RESERVED

[WWW.POWERTAC.COM](http://WWW.POWERTAC.COM)